



Product End of Life Disassembly Instructions

1. **Product Category:** Thin Client
2. **Marking Name / Model:** UltrArmor UA7 / N700
3. **System No.:** 10D3H50xxx
4. **PURPOSE:**

This document is intended for use by end-of-life recyclers or treatment facilities. It provides the basic instructions for the disassembly of UltrArmor UA7 products to remove components and materials requiring selective treatment, as defined by EU WEEE Directive 2012/19/EU

5. **Selective Treatment for Material and Components according to ANNEX VII of DIRECTIVE 2012/19/EU on waste electrical and electronic equipment (WEEE)**

Item Description	Notes	Q'ty of items included in product
Printed Circuit Boards (PCB) or Printed Circuit Assemblies (PCA)	With a surface greater than 10 sq cm	In UA7: <ul style="list-style-type: none"> ● Main Board x1^{*1} ● USB CARD x1^{*2} ● Power Switch card x1^{*2} ● memory modules x2^{*2} ● In power adapter x1^{*3}
Batteries	All types including standard alkaline and lithium coin or button style batteries	Lithium Coin Battery x1 ^{*4}
Mercury-Containing Components	For example, mercury in lamps, display backlights, scanner lamps, switches, batteries	
Liquid Crystal Displays(KCD) with a surface greater than 100 sq cm	Includes background illuminated displays with gas discharge lamps	
Cathode Ray Tubes (CRT)		
Capacitors / condensers (Containing PCB/PCT)		
Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height		Not used in UA7 N700. in power adapter x1 ^{*5}
External Electrical Cables and cords		Power Cord for power adapter ^{*6}
Gas Discharge Lamps		
Plastics Containing Brominated Flame Retardants		
Components and parts containing toner and ink, including liquids, semi-liquids (gel/paste) and toner	Include the cartridges, print heads, tubes, vent chambers, and service stations	
Components and waste containing asbestos		
Components, parts and materials containing refractory ceramic fibers		
Components, parts and materials containing radioactive substances		

*1: See 7-6: Remove Main Board in page 5

*2: See 7-3: Remove SSD, RTC Battery, SO-DIMM Memory Modules, USB CARD, Power Switch CARD in Page 4


*3: See 8-5. Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height in page 10

*4: See 7-3. Remove SSD, RTC Battery, SO-DIMM Memory Modules in page 4

*5: See 8-5. Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height in page 10

*6: See 8-2. External Electrical Cables and cords in page 9

Note: Refer to the location of the on-board eMMC (embedded MultiMediaCard) on the underside of the motherboard

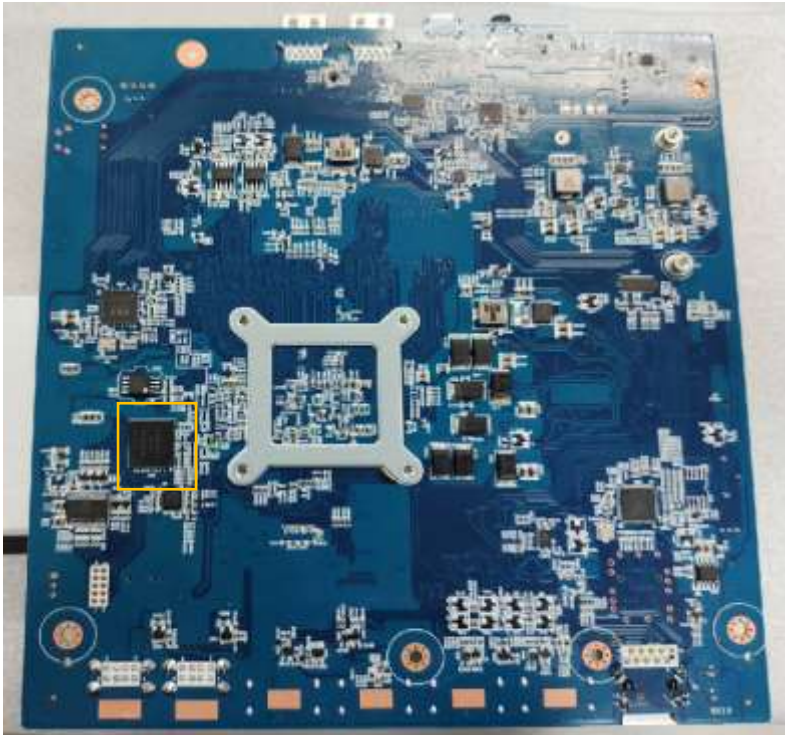

6. Type and size of the tools that would typically be used to disassemble the product to a point where components and materials requiring selective treatment can be removed



Philips screwdriver
Slotted screwdriver



Hammer



Stanley knife or similar



8mm hex socket



Needle-nose pliers

7. Disassembly Process.

7-1. Remove Foot Stand



① Foot Stand

① Loosen the quick release screw on the foot stand to detach it from the device.



M3*10L*0.5P


7-2. Remove Top Cover




Remove two screws (M3*5L*0.5P) on the rear panel



Push in the direction of the arrow to remove the top cover



7-3. Remove SSD, RTC Battery, SO-DIMM Memory Modules, USB CARD, Power Switch CARD

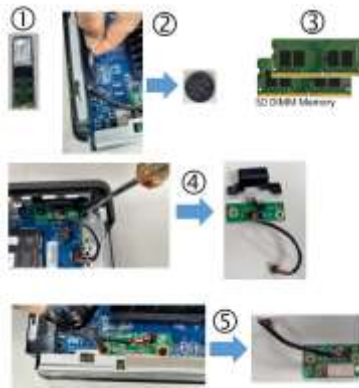

- ① SSD (Optional)
- ② RTC Battery
- ③ SO DIMM Memory Module
- ④ USB CARD
- ⑤ Power Switch CARD & Power Switch Cover

7-4. Remove Rear I/O Panel



Remove two screws (M3*4L*0.5P) on two sides of the rear panel



7-5. Remove CPU Heatsink



7-6. Remove Main Board



Pull up the speaker wire

Remove ①~④ screws










M3*5L*0.5P







Al foil adheres to the metal part, remove it before remove the main board.


7-7. Remove on-board EMI parts & CPU Bracket

 <ul style="list-style-type: none"> ① EMI Al foil on Audio & USB-C ② EMI Al foil on USB-A ③ EMI Al foil on DP ④ EMI Gasket on DP ⑤ EMI Al foil on USB-A ⑥ EMI Gasket on Rear Panel 	     
--	---

7-8. De-assemble Bottom Cover Assembly Parts

 <ul style="list-style-type: none"> ① Speaker Cover ② Thermal Pad 	<p>① Loosen two screws to remove speaker cover</p>   <p>② Peel off the thermal Pad from the metal base</p> 
---	--

7-9. Disassemble Base Assembly Parts

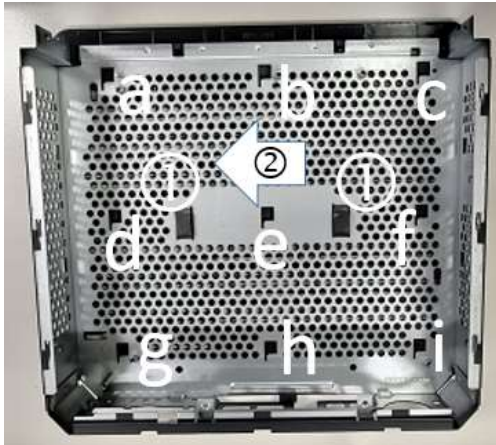

- ① Loosen and remove two screws (M3*4L*1P)
- ② Push inner metal base in the direction of arrow and ensure that the four-point plastic hooks (a,b,c,d,e,f,g,h,i) are disengaged from the fixed state to remove the metal piece.



7-10. Disassembly WiFi/BT module and related assembly parts (Optional)

7-10.1 Remove two external antenna




- ① Rotate manually to loosen two external antenna



7-10.2 Remove M.2 WiFi/BT Module







Loose the screw
(M2*4L*0.4P)











Remove the plastic cover ,
detach two antenna cables
(a, b) and WiFi module



7-10.3 Remove Rear I/O Panel with two antenna cables

 <div data-bbox="188 571 596 633" style="border: 1px solid black; padding: 2px; text-align: center;">Remove ANTENNA COVER</div> 	<p>Detach the tape that fixes the antenna cables.</p>  <p>Remove two screws (M3*4L*0.5P) on two sides of the rear panel then remove the rear I/O Panel</p> 
--	---

7-10.4 Disassembly rear I/O panel with antenna cable

  <p>bottom of the antenna connector</p> 	 <p>Antenna Cable (2pcs/per unit)</p>  <p>Nuts (2pcs/per cable)</p>  <p>Washer (1pcs/per cable)</p> <p style="text-align: right;">Rear I/O Panel</p> <p>tool the</p>  <p>Remove the cable slowly from the antenna hole in rear I/O Panel and 1pcs washer</p> 
--	---

8. Disposal

After you have disassembled the device completely, carefully dispose of the individual parts.

8-1. Representative plastics reference list (over 25g)



Bottom Base
(96g)



Top Cover
(93g)



Foot Stand
(60g)


8-2. External Electrical Cables and cords



8-3. Printed Circuit Boards (PCB) or Printed Circuit Assemblies (PCA)



System Main Board



SO DIMM



SSD
(Optional)



Power Adaptor



USB card



Power Switch card

8-4. Battery



Lithium Coin Battery

8-5. Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height

Notice 1: No such part designed in UA7 N700 product but it can be found in power adaptor.

Notice 2: These instructions are intended solely for recycling organizations for disposal purposes only! After opening the power supply unit, it must no longer be used.

Step 1: Disassemble plastic housing

Use hammers, screw driver to break the plastic housing at the sealed joint



Step 2: Disassemble the metal & plastic parts around PCBA Module

Release the screws on brackets and PCB heatsink on the back to take them off and isolated mylar, too.



Step 3: Capacitor is accessible to be removed

Release two pins on the capacitor with pliers then remove the capacitor.



